




DRY BOX

DRY BOX											
	Peso		Capa cità	Dimensioni esterne (mm)			Dimensioni interne (mm)			Apertura Porta	
	Payload kg	Tara in kg	Cbm	Lung.	Larg.	Alt.	Lung.	Larg.	Alt.	Larg.	Alt.
20'DC	21700- 28240	2210- 2400	33.3	6058	2438	2591	5900	2345	2400	2335	2290
40 DC	26740- 26850	3630- 3740	67.7	12192	2438	2591	12030	2345	2400	2335	2290
40'H	26580- 26600	3880- 3900	76.5	12192	2438	2896	12030	2350	2710	2335	2595

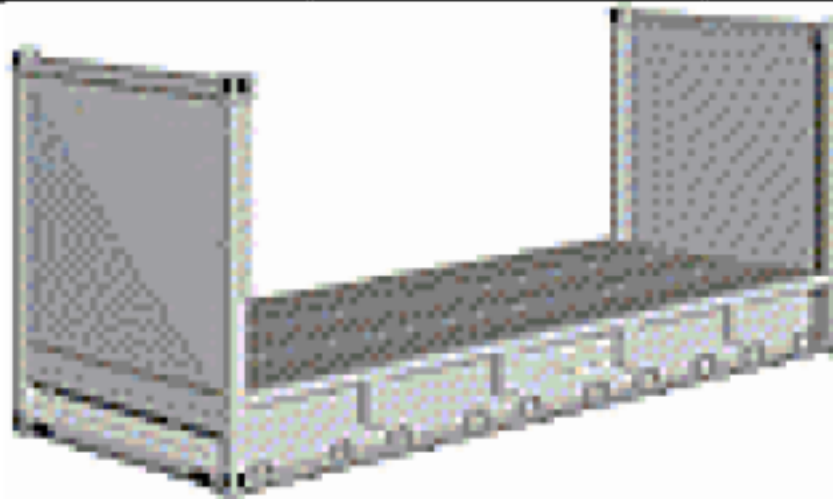

FLAT RACK

FLAT RACK											
	Peso		Capa cità	Dimensioni esterne (mm)			Dimensioni interne (mm)			Piano di Carico	
	Payload kg	Tara in kg	Cbm	Lung.	Larg.	Alt.	Lung.	Larg.	Alt.	Lungh. Laterale	Larg. Tra sponde
20'FR	17859- 30150	2350- 2500		6058	2438	2591	5900	2400	2270- 2285	5530- 5700	2230- 2250
40' FR	40100	4900		12192	2438	2591	12150	2400	2035	11835	2230- 2240



OPEN TOP

OPEN TOP													
	Peso		Capa cità	Dimensioni esterne (mm)			Dimensioni interne (mm)			Apertura Porta		Apertura Tetto	
	Payload kg	Tara in kg	Cbm	Lung.	Larg.	Alt.	Lung.	Larg.	Alt.	Larg.	Alt.	Lung.	Larg.
20'OT	21770- 28230	2230- 2250	31.8- 32.9	6058	2438	2591	5900	2330- 2340	2380	2330	2220- 2250	5740- 5760	2190- 2210
40' OT	26830	3650	67.1	12192	2438	2591	12045	2340	2380	2335	2255	11890	2185- 2210




REEFER CONTAINER

REEFER CONTAINER (temperatura controllata -25/+25°C)												
	Peso		Capa cità	Dimensioni esterne (mm)			Dimensioni interne (mm)			Apertura Porta		Voltaggio/ Hz
	Payload kg	Tara in kg	Cbm	Lung.	Larg.	Alt.	Lung.	Larg.	Alt.	Larg.	Alt.	3-phase
20'RC	17090- 27280	2850- 3500	26.2- 28.3	6058	2438	2591	5480- 5500	2230- 2285	2135- 2255	2165- 2285	2160- 2210	180-220V & 380-440V, 50/60Hz
40' RC	25080- 25980	4500- 5400	57.5- 58.7	12192	2438	2591	11235- 11575	2240- 2285	2175- 2250	2240- 2280	22000	380/440V, 50/60Hz
40' HR	25780- 29250	4700- 5200	66.7- 68	12192	2438	2895	11575	2280- 2550	2525- 2550	2280- 2290	2435	380/440V, 50/60Hz



VENTILATED CONTAINER

VENTILATED CONTAINER											
	Peso		Capa cità	Dimensioni esterne (mm)			Dimensioni interne (mm)			Apertura Porta	
	Payload kg	Tara in kg	Cbm	Lung.	Larg.	Alt.	Lung.	Larg.	Alt.	Larg.	Alt.
20' DC	21350- 27000	2160- 2780	32.2- 33.8	6058	2438	2591	5885- 5935	2330- 2370	2375- 2410	2285- 2335	2260- 2290

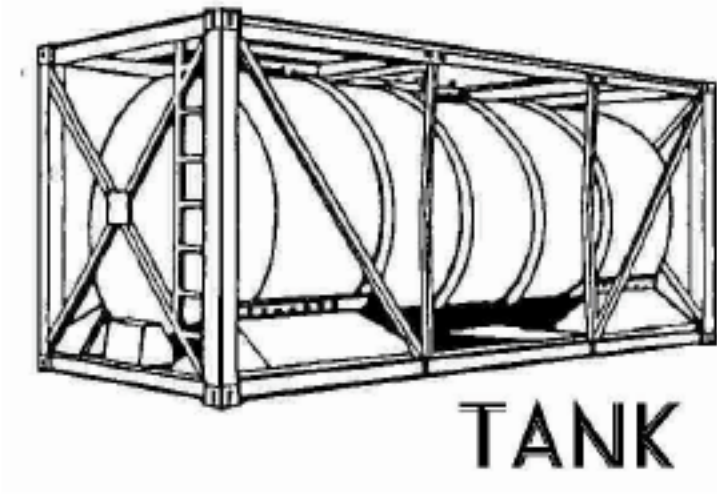

TANK CONTAINER

TANK CONTAINER						
Peso		Capacità	Dimensioni esterne (mm)			
Tara kg	Payload kg	Litri	Lung.	Larg.	Alt.	
3159	30480	24000	6058	2438	2591	



COLLAPSIBLE CONTAINER

COLLAPSIBLE CONTAINER					
Peso		Dimensioni interne (mm)			
Payload kg	Tara in kg	Lung.	Larg.	Alt.	
20'DC	27722	2749	5630	2200	2230
40 DC	38918	5800	12060	2080	1950

